


Typ / Type : ER/EQ 315-4		Art.-No. : E10-31505 / E00-31505	
U	230V (50Hz)	Δpfa min	-- Pa
P <sub>1</sub>	0.12 kW	ΔI	-- %
I <sub>N</sub>	0.55 A	I <sub>A</sub> / I <sub>N</sub>	2.4
n	1380 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	3 μF	★	01.025
t <sub>R</sub>	60 °C	■	8,5 / 9 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	50	62	65	63	63	60	52

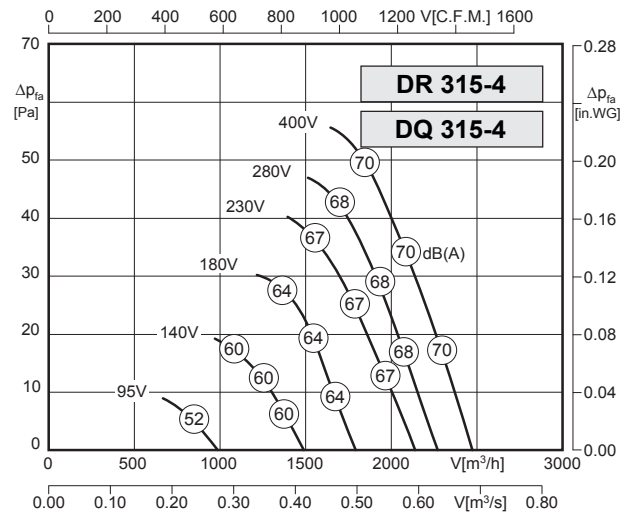

Typ / Type : DR/DQ 315-4		Art.-No. : E10-31555 / E00-31555	
U	400V (50Hz)	Δpfa min	-- Pa
P <sub>1</sub>	0.12 kW	ΔI	-- %
I <sub>N</sub>	0.33 A	I <sub>A</sub> / I <sub>N</sub>	2.6
n	1385 min <sup>-1</sup>	▲	IP54
C <sub>400V</sub>	-- μF	★	01.006
t <sub>R</sub>	60 °C	■	8,5 / 9 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	50	62	65	63	63	60	52

01.006

01.025

