


Typ / Type : DR/DQ 800-6		Art.-No. : E10-80080 / E00-80080	
U	400V (50Hz)	Δpfa min	- Pa
P ₁	1.30 kW	ΔI	- %
I _N	2.60 A	I _A / I _N	2.9
n	845 min ⁻¹	▲	IP54
C _{400V}	- μF	★	01.006
t _R	70 °C	■	38 / 37 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	69	73	76	78	77	72	64

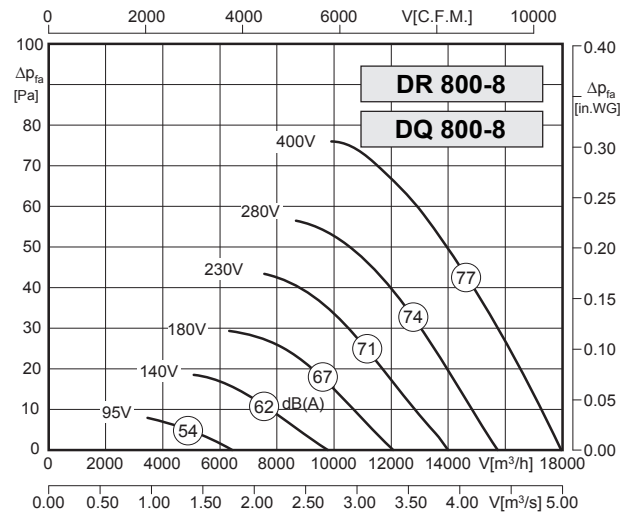

Typ / Type : DR/DQ 800-8		Art.-No. : E10-80090 / E00-80090	
U	400V (50Hz)	Δpfa min	- Pa
P ₁	0.75 kW	ΔI	- %
I _N	1.85 A	I _A / I _N	2.5
n	665 min ⁻¹	▲	IP54
C _{400V}	- μF	★	01.006
t _R	70 °C	■	36 / 35 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	63	66	70	70	70	65	58

01.006

